




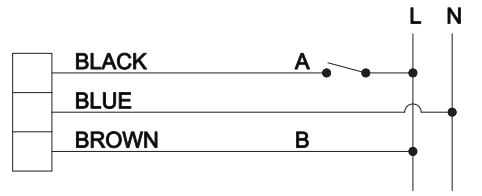


WITH CABLE

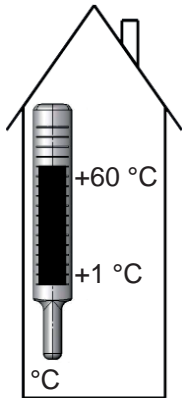

WITH MOLEX CONNECTOR

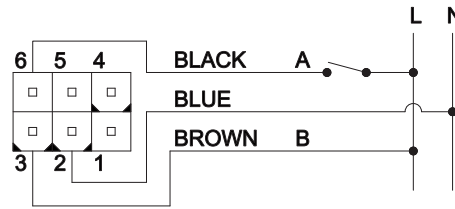

Amb. temp.



Diff. press. 0,1 MPa / 1 bar  
 Max press. 1,0 MPa / 10 bar



RoHS 2002/96/CE  
 WEEE 2003/11/CE



LK Armatur

[www.lkarmatur.se](http://www.lkarmatur.se)

# LK 525



3-way Zone valve  
 3-wege Zonenventil

LK Armatur AB

Garnisonsgatan 49 • SE-254 66 Helsingborg • Sweden

Phone: +46 (0)42-16 92 00 • Fax: +46 (0)42-16 92 20

[info@lkarmatur.se](mailto:info@lkarmatur.se) • [www.lkarmatur.se](http://www.lkarmatur.se)

Mounting and Operating Instructions

Montage- und Bedienungsanleitung

## Technical information

Material - | valve | Ventilgehäuse: Brass | Messing | Laiton EN 12165 CW617N, (MS58)

Actuator | Stellmotor: 7 VA, 230 50 Hz, IP 40

Operation time | Laufzeit: ca. 8 sek

Connection by cable | Anschluss mit Kabel: 3-wire | 3-Leiter

Signal connector | Signalkontakt: 1-pole SPST | Signalkontakt ein-polig SPST

